

CHENGLIAN

产品特性 Product Features




- ✓
- ✓
- ✓
- ✓
- ✓
- ✓
- ✓
- ✓

应用领域 Application area

参考标准 Reference standard

产品描述 Product Description

 **产品命名**
Product Naming

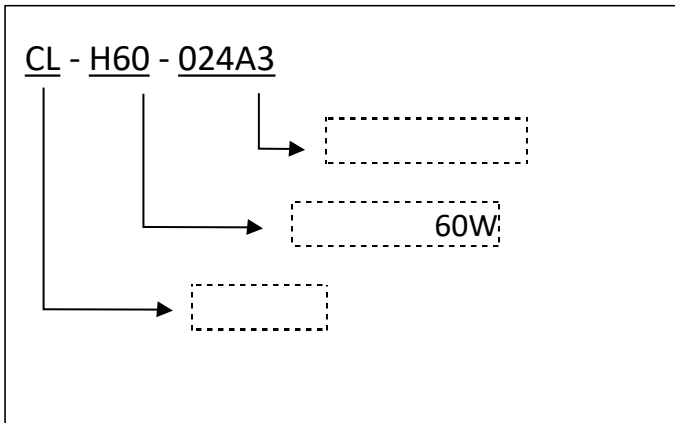


 **电气参数**
Electrical parameters


	CL-H60-024A3	CL-H60-036A3	CL-H60-042A3	CL-H60-048A3
	176~305VAC()			
	0.3A/230VAC			
	47~63Hz			
(typ.)	87.8%	88.2%	88.5%	89.2%
	PF≥0.95/230VAC			
	<0.7mA/240VAC			
	60A/230VAC			
	24V	36V	42V	48V
	2.5A	1.65A	1.42A	1.25A
	60W	59.4W	59.6W	60W
	/			
	240mVp-p	250mVp-p	300mVp-p	500mVp-p
	1000ms	50ms/230VAC	100%	
	30ms/230VAC	100%		
	±0.5%	±0.5%	±0.5%	±0.5%
	±2%	±2%	±1.5%	±1.5%
	±1.0%	±1.0%	±1.0%	±1.0%
	-40~70 20%~95%RH			
	-40~80 10%~95%RH			
	10~500Hz,	2G,	10min, X,Y,Z	6
	20G,	11ms, X,Y,Z	3	
	5000m	2000m	100m	0.6)
	EN55015;EN61000-3-3;GB17743,GB17625.1			
	EN61000-3-2 Class C(@ 60%)			
	EN61000-4-2,3,4,5,6,8,11;EN61547 4kV, 6kV B			
	GB19510.1,GB19510.14;IEC/EN61347-1 EN61347-2-13;			
	-- I/P-O/P:3.75kVac	---	I/P-CASE:2kVac	--- O/P-CASE:0.5kVac
	1min			
	I/P-O/P 50M ohms	I/P-Case 50M ohms	O/P-Case 50M ohms	
	25~30V	38~42V	44~48V	50~60V

		110~165%
MTBF	25	≥150000Hrs MIL-217 Method
		138*45*29mm * *
		0.29 Kg/ 36 / 10.9KG/
		<input checked="" type="checkbox"/> o
		o o <input checked="" type="checkbox"/> -40)o
*		230VAC 25
*		30% 100W
	130W	
*		20MHz
	12mm	47uF 0.1uF
*	EMC	


● 额定负载 VS 环境温度降额曲线 ● 输入电压与负载降额曲线

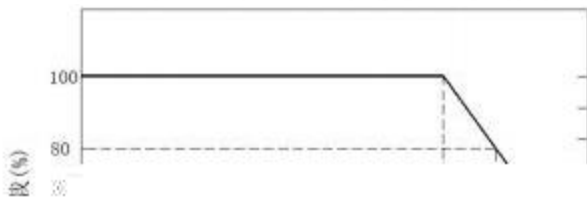

● 壳温与寿命曲线

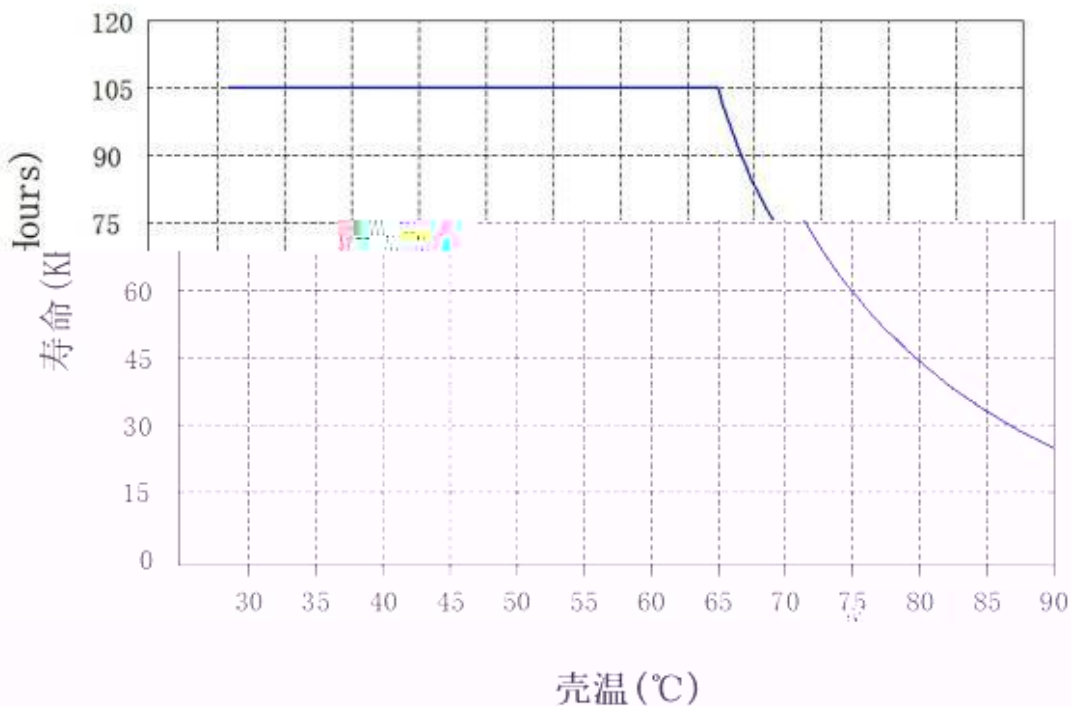

机构尺寸
Organizational size

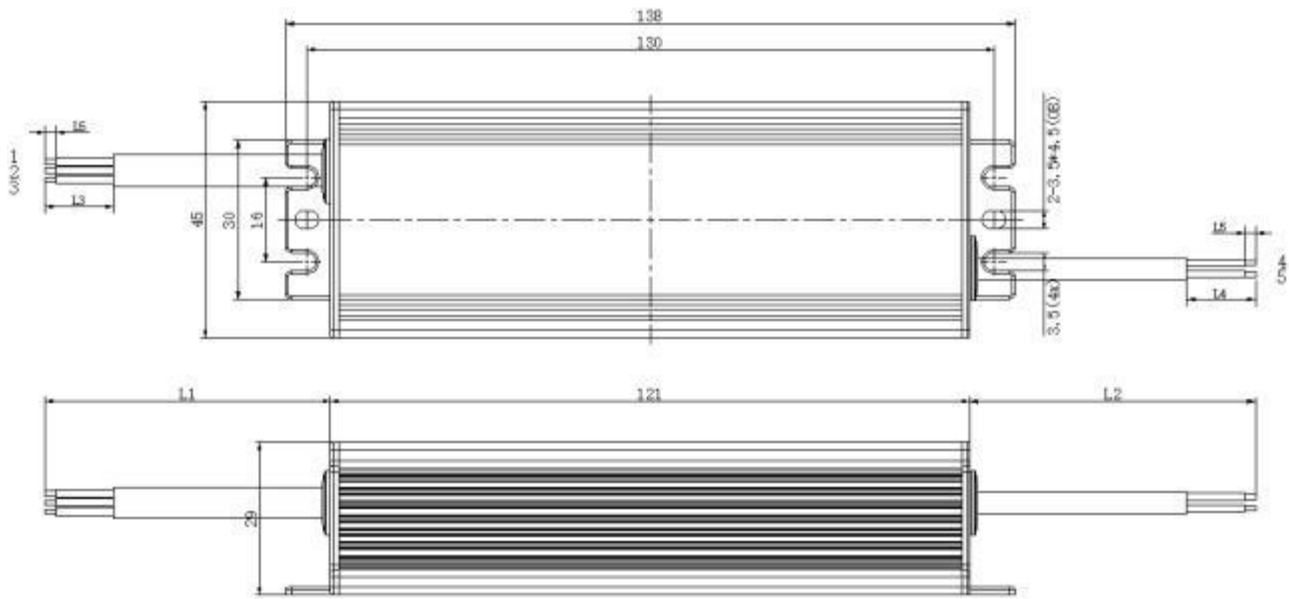

产品安装 使用说明:

运输、储存:
Transportation and storage: