

CHENGLIAN

产品特性 Product Features



应用领域 Application area

参考标准 Reference standard



UL62368

产品描述 Product Description

 **电气参数**
Electrical parameters

	CZL-60A-12	CZL-60A-12	CZL-60A-12	CZL-60A-12
	176~264VAC			
	230VAC/0.7A			
	85%	88%	87%	87%
	47~63HZ			
	<1mA/240VAC			
	50A/230VAC			
	12V	24V	36V	48V
	5A	2.5A	1.6A	1.2A
	60W	60W	57.6W	57.6W
	± 5%	± 5%	± 3%	± 3%
	150mVp-p	150mVp-p	200mVp-p	200mVp-p
	2000ms	50ms/230VAC	100%	
	20ms/230VAC	100%		
	± 0.5%	± 0.5%	± 0.5%	± 0.5%
	± 0.5%	± 0.5%	± 0.5%	± 0.5%
	± 1.0%	± 1.0%	± 1.0%	± 1.0%
	-30~70	25		
	-30~80	25		
	10~500Hz,	2G,	10min,	X,Y,Z 6
	20G,	11ms,	X,Y,Z	3
	2000mtrs	2000m	100m	0.6)
	EN55024	EN61000-4-2,3,4,5,6,8,11		
	GB17625.1	EN61000-3-2,-3		
EMC	EN55032			
	GB4943/UL62368			
	--	I/P-O/P:3Kvac/5mA	---	I/P-CASE:1.8Kvac/5mA ---
		O/P-CASE:0.5Kvdc/5mA		1min
	I/P-O/P	10M ohms	I/P-Case	10M ohms O/P-Case 10M ohms
	13.5-16.5	27-30	39-42	52-55
	110~165%rated			
	/			

	MTBF	25	100000Hrs	MIL-217 Method	
		99*82*30	* *		
		0.2 Kg/	60 /	13KG/	
		<input checked="" type="checkbox"/>	<input type="checkbox"/>		
		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-40) <input type="checkbox"/>
	*			230VAC	25
	*			30%	100W
	130W				
	*		20MHz		
	12mm		10uF	0.1uF	
	*	EMC			

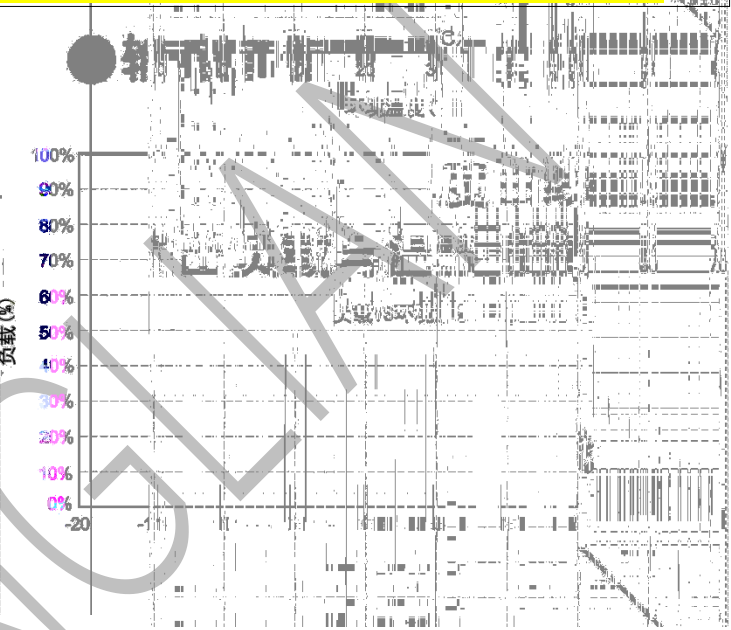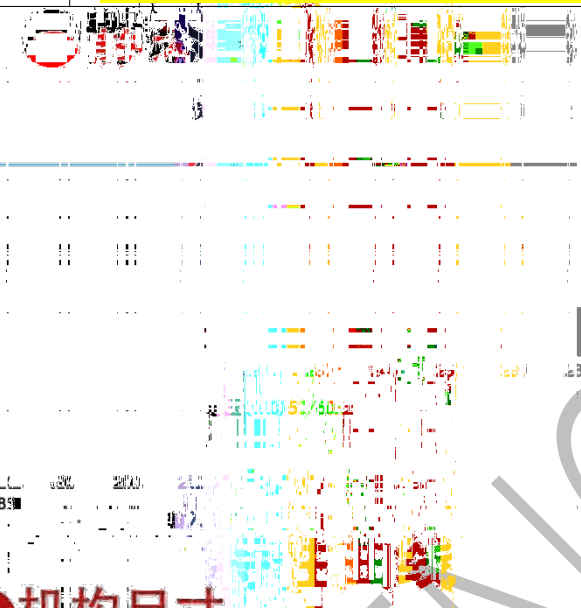


机构尺寸
Organizational size

CHEUNG

安装方式: Installation method:

警示

- 使用安装螺丝M3*6mm,
- 深入外壳螺丝深度MAX 3mm,
- 详见右图

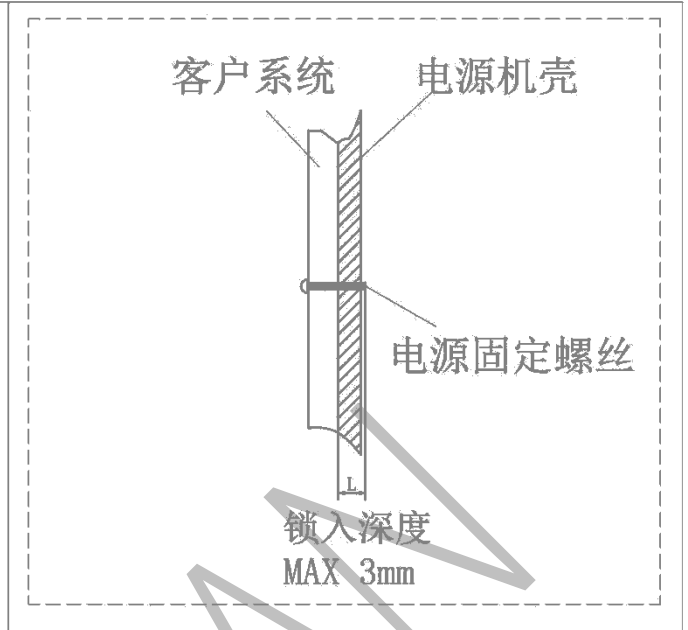

产品安装、使用说明: Installation and User Guide:

运输、储存: Transportation and storage:

CHEENGLIAO