



# CHENGLIAN

## 产品特性 Product Features



- ✓
- ✓
- ✓
- ✓
- ✓
- ✓
- ✓
- ✓

## 应用领域 Application area

## 参考标准 Reference standard

## 产品描述 Product Description

[Redacted]

[Redacted]

≥ ≥ ≥ ≥

[Redacted]

[Redacted]

[Redacted]

± ± ± ±

,

± ± ± ±

± ± ± ±

± ± ± ±

°C ( )

°C

[Redacted]

( , , °C)

: ;

: ;

:

:

; ;

:


[Redacted]

℃ : ,  
( )




( °C)

, , °C .  
:  
:



## ● 静态特性曲线

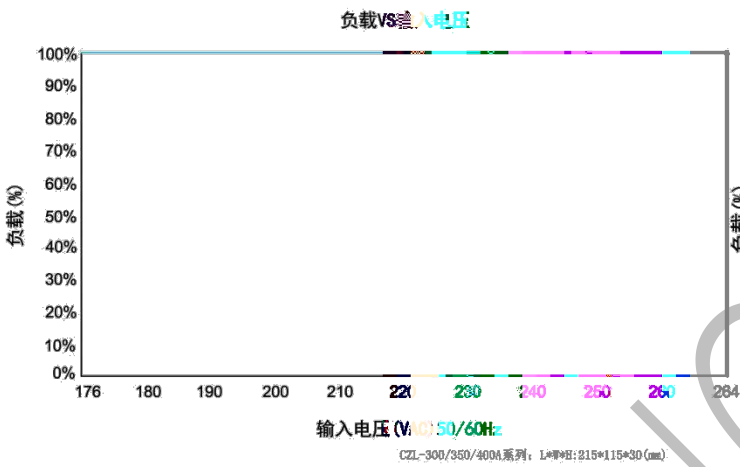

## ● 输出负载与温度曲线

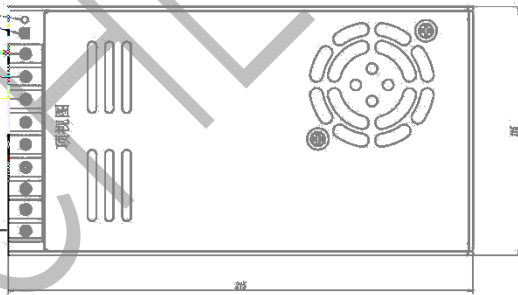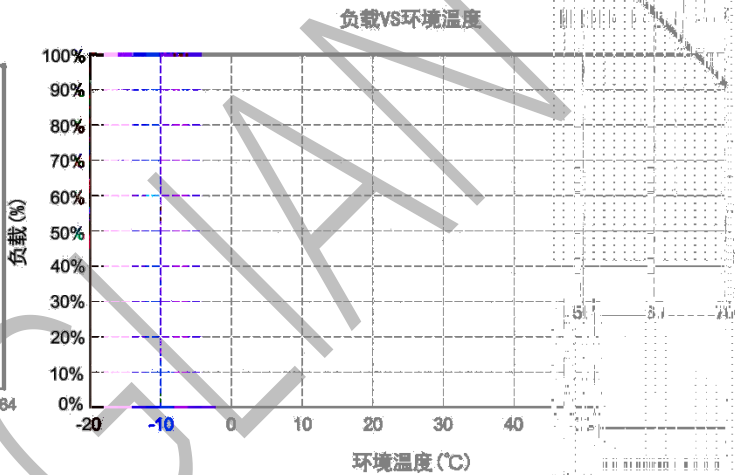


| 引脚 | 功能    |
|----|-------|
| 1  | AC(L) |
| 2  | AC(N) |
| 3  | ⊕     |
| 4  | COM   |
| 5  | COM   |
| 6  | COM   |
| 7  | +V    |
| 8  | +V    |
| 9  | +V    |

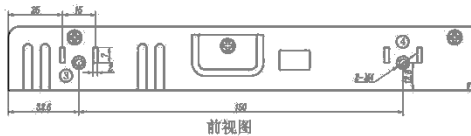

①-⑥ 任意一个位置必须要接大地(⊕)

| 安装位置 | 螺丝规格 | L(Max) | 扭矩(Max) |
|------|------|--------|---------|
| ①-④  | M4   | 3mm    | 0.4N.m  |
| ⑤-⑥  | M4   | 3mm    | 0.4N.m  |

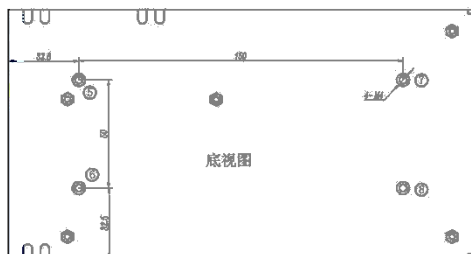

接线端子安装说明

| 端子排规格 | 线材安装规格   | 扭矩(Max) |
|-------|----------|---------|
| 96端子排 | 22-12AWG | 0.5N.m  |

尺寸单位: mm  
ADJ: 输出可调电阻  
未标注之公差: ±1mm

 **安装方式:**  
Installation method:

 **产品安装、使用说明:**  
Installation and User Guide:

 **运输、储存:**  
Transportation and storage:

CHENGLIAN