
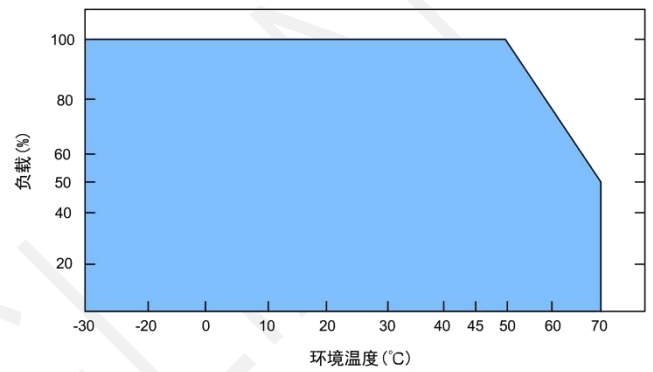


CAR-480-24	CAR-480-36	CAR-480-48
90~264VAC 127~370VDC()		
4.8A/115VAC,2.3A/230VAC		
17~62H		

CHEENGLIAO






MTBF	25	300000Hrs MIL-217 Method			
	85*123.4*128.4mm W*H*D				
	1.5Kg/	8	/	12.5KG/	
	<input checked="" type="checkbox"/>	<input type="checkbox"/>			
*			230VAC	25	
*			30%		100W
130W					
*		20MHz			
12mm		47uF	0.1uF		
*			EMC		

● 输出负载与温度曲线

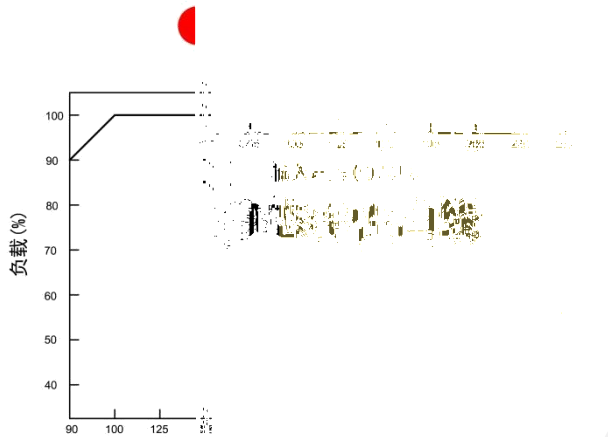

● 机构尺寸


Organizational size

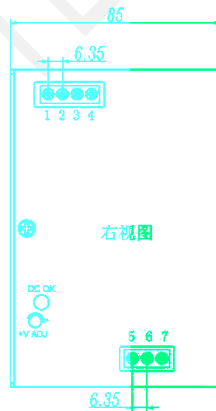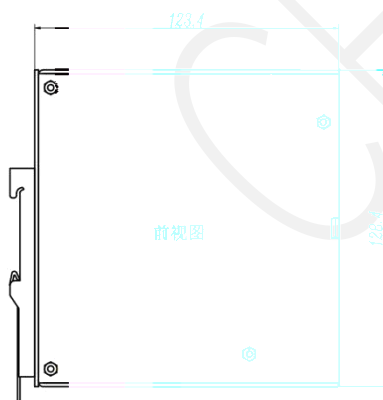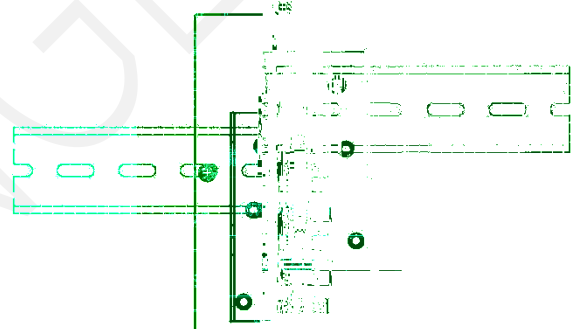

引脚	功能
1	+V
2	+V
3	-V
4	-V
5	⊕
6	AC
7	AC

接线端子安	端子排规格	引脚	最大扭矩
端子排规格	2AT	1-4	7Lb-in
635端子排	2AT	5-7	9Lb-in

尺寸单位: mm
 DC OK: 输出
 ADJ: 输出
 导轨类型:
 未标注之



运输、储存：
Transportation and storage:

CHEUNG LIAN