

CAR



CAR-240

产品特性

Product Features



- ✓
- ✓ 90~264VAC/127~370VDC
- ✓ ()
- ✓ -30~+70
- ✓ PFC PF 0.98
- ✓ 93%,
- ✓ / / /
- ✓ :TS-35/7.5 TS-35/15
- ✓
- ✓ 100%
- ✓ 3

应用领域

Application area

参考标准

Reference standard

IEC/EN/UL/BS EN 62368 EN 61000 UL508 GB4943

产品描述


Product Description

CAR-240	240W	90~264VAC	12V 24V
36V 48V			93%



产品命名

Product Naming


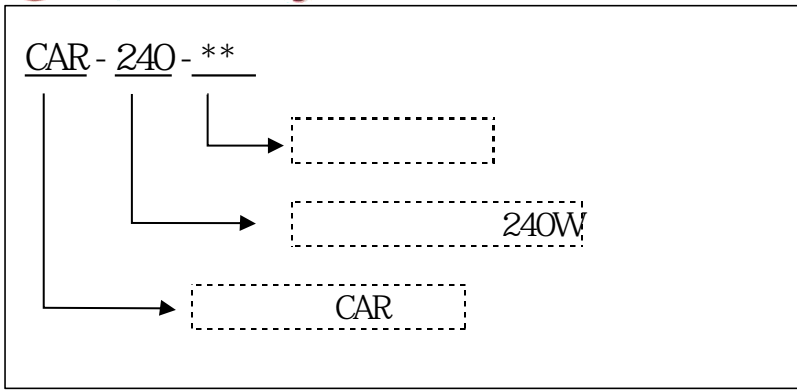



电气参数



Electrical parameters

	CAR-240-12	CAR-240-24	CAR-240-36	CAR-240-48
	90-264VAC 140-370VDC()			
	2.5A/115VAC, 1.3A/230VAC			
	47-63Hz			
(typ.)	90%	93%	92.5%	93%
	<1.0mA/240VAC			
	50A/230VAC			
	12V	24V	36V	48V
	16.7A	10A	6.6A	5A
	200.4W	240W	237.6W	240W
	12-14	24-28	36-40	48-55
	150mVp-p	150mVp-p	0mVp-p	150mVp-p
	1500ms 90ms/230VAC			
	22ms/230VAC			
	0.5%	0.5%	0.5%	0.5%
	1.0%	1.0%	1.0%	1.0%
	2.0%	1.0%	1.0%	1.0%
	-30~70 20%~95%RH			
	-30~80 10%~95%RH			
	10~500Hz,	2G,	10min, X,Y,Z	6
	20G,	11ms, X,Y,Z	3	
	5000m 2000m	100m	0.5	
	BS EN55032 CISPR32), BS EN61204-3 CLASS B;			
	EN61000-3-2,3, CLASS A			
	EN61000-4-2,3,4,5,6,8,11; EN55024 EN50082-2, EN61000-3-2,3			
	TUV BS EN/EN62368-1, AS/NZ62368.1, UL508,			
	-- I/P-O/P: 3.0kVac	---	I/P-FG: 1.8kVac	--- O/P-FG: 0.5kVac
	1min			
	I/P-O/P	100M ohms	I/P-FG	100M ohms
	O/P-FG	100M ohms	O/P-FG	100M ohms
	17V	33V	49V	62V
	110~150%			

MTBF	25	300000Hrs	MIL-217 Method
	48.2*126.2*110.7mm W*H*D		
	1Kg/	12 /	12.5KG/
	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
*		230VAC	25
*		30%	100W
130W			
*		20MHz	12mm
*	47uF	0.1uF	
*		EMC	

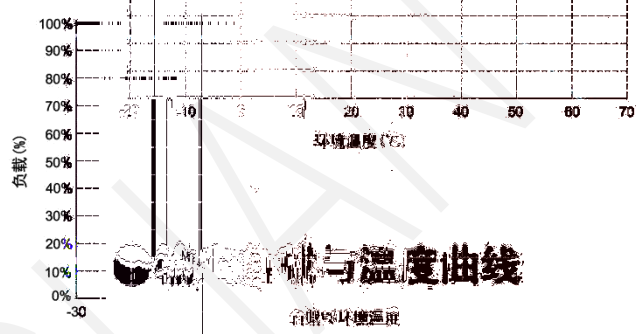

机构尺寸 Organizational size

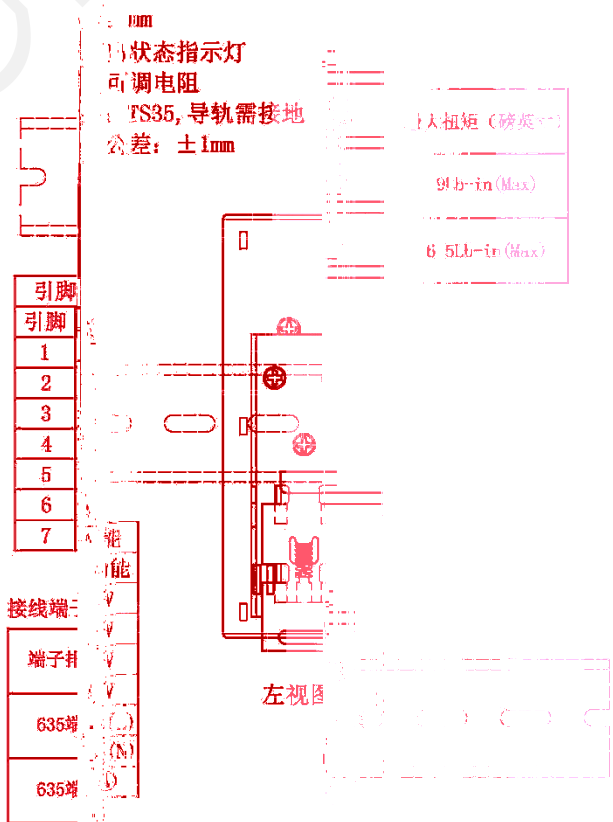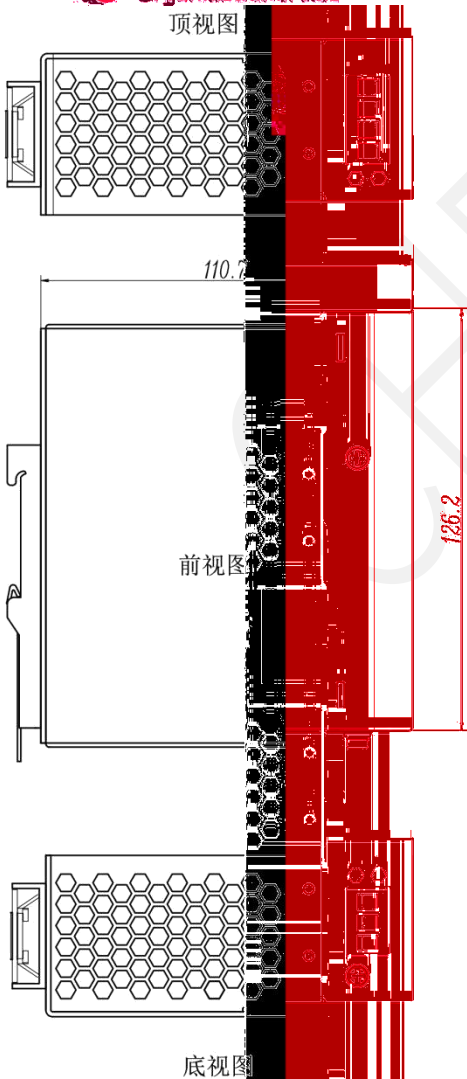

尺寸单位: 毫米

DC OK:	接	线材安装规格	22-12AWG
ADJ: 输	排	22-12AWG	
导轨类	排	22-12AWG	
未标注	排	22-12AWG	

产品安装 使用说明:
Product Installation and Use Guide

- 1
- 2
- 3
- 4
- 5
- 6

AWG18#

0519-69882516

运输、储存:
Transportation and storage:

- 1
- 2

50cm

1

20cm

CHEUNG LIAN